

ENDURE[®] D53 carbon black



GENERAL DESCRIPTION

Many industrial rubber product applications operate under severe conditions that lead to significant wear and tear. Improved durability of the rubber components may provide a distinct total cost advantage. As part of our ongoing commitment to deliver solutions that meet our customers' needs, we have developed the ENDURE[®] family of carbon blacks engineered for durability.

Improving wear, chunking and tear resistance or reducing heat buildup can result in longer part life, reducing costly equipment downtime, increasing throughput and enhancing end user profitability. Our products can enhance rubber part life and durability by optimizing the balance between heat buildup and reinforcement and are identified by the letter "D" in the ENDURE nomenclature system.

In certain applications such as conveyor belts, reduced hysteresis in the rubber compound may also be of interest as it can result in decreased power consumption, representing a significant energy and operating cost saving. In other applications such as rubber tracks and certain mill liners, a decrease in hysteresis can help with extending part life. Cabot products can help reduce energy costs and part life by optimizing the balance between hysteresis and reinforcement and are identified by the letter "E" in the ENDURE nomenclature system.

PERFORMANCE FEATURES

ENDURE[®] D53 carbon black is the next step after ASTM N234, N110 and N115 type carbon black in resistance to abrasion in natural and synthetic rubber compounds. Specific mixing conditions are recommended to achieve the desired dispersion.

TYPICAL APPLICATIONS

- ◆ Top cover of high abrasion resistant conveyor belts
- ◆ Tread of rubber tracks
- ◆ Mining mill liners

ENDURE[®] D53 carbon black

TECHNICAL DATA

ENDURE D53 carbon black can improve reinforcement and abrasion resistance of rubber compounds compared to compounds made with ASTM N300, N234 and N115 carbon black.


100 NR Formulation	ASTM N234	ASTM N115	ENDURE [®] D53 CB
Loading (phr)	50	50	50
Hardness (Shore A)	66	65	67
Tensile Strength (MPa)	29.4	29.2	30.6
100% Mod (MPa)	2.7	2.5	2.7
300% Mod (MPa)	14	12.1	14.2
Elongation at Break (%)	545	570	555
Tear Strength (N/mm)	142	146	145
Rebound @23 °C (%)	50	49	48
Tan δ max @25 °C	0.22	0.23	0.24
Cabot Abrader (Index)*	97	100	110

* higher index is better

Test Formulation: 100 phr NR, 50 phr carbon black

Cabot Abrader (50 phr carbon black in NR test compound)

Higher Index = Better Abrasion Resistance

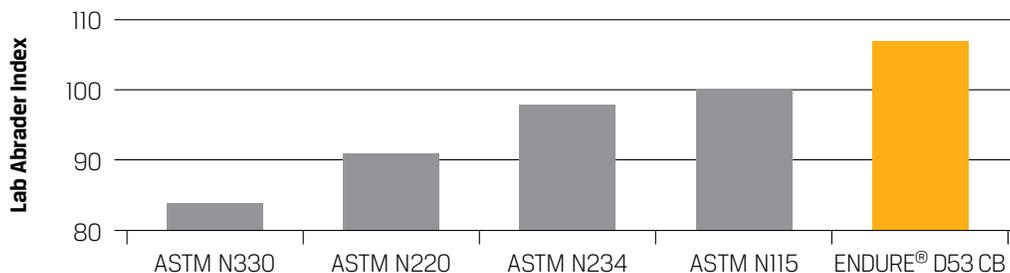

For information on product-specific storage conditions, please refer to the applicable Safety Data Sheet (SDS) available from your Cabot representative or at cabotcorp.com/contact

This information is provided as a convenience and for informational purposes only. No guarantee or warranty as to this information, or any product to which it relates, is given or implied. This information may contain inaccuracies, errors or omissions and CABOT DISCLAIMS ALL WARRANTIES EXPRESS OR IMPLIED, INCLUDING MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE AS TO (i) SUCH INFORMATION, (ii) ANY PRODUCT OR (iii) INTELLECTUAL PROPERTY INFRINGEMENT. In no event is Cabot responsible for, and Cabot does not accept and hereby disclaims liability for, any damages whatsoever in connection with the use of or reliance on this information or any product to which it relates.

The ENDURE[®] brand is a registered trademark of Cabot Corporation.

©2025 Cabot Corporation. All rights reserved worldwide. END53_pds 12/2025