

## PLASBLAK® PE2648



### Utility Black Masterbatch for Film, Extrusion and Compounding Applications

PLASBLAK PE2648 is a utility black masterbatch offering the following excellent performance benefits:

- High level of opacity (see graph)
- High tinting strength
- Excellent gloss levels

PLASBLAK PE2648 is designed to provide good pigmentation in film applications. Typical end products are garbage bags, consumer packaging, builders and agricultural film. This product is also recommended for applications requiring the pigmentation of recycled material.

This product is suitable for use in a wide range of plastics that come into contact with food. For more details regarding the food contact compliance in various European countries, please refer to the relevant Food Contact Statement that you can obtain through your usual Cabot representative.

### Method of Addition

PLASBLAK PE2648 is designed for ease of dilution and homogeneous mixing and is therefore suitable for direct addition using automatic dosing units or by pre-blending.

### Addition Rate

The amount of masterbatch added depends on the performance requirements of the final application. Typical addition rates vary from 2% to 4% masterbatch.


# PLASBLAK<sup>®</sup> PE2648

## Physical Properties

PROPERTY	VALUE	TEST METHOD (*)
Carrier	polyethylene	-
Pigment	carbon black	-
Compatibility	LDPE, LLDPE, HDPE, PP, ethylene copolymers	-
Density @ 23°C	1610 kg/m <sup>3</sup>	CTM E023
MFI 10 kg/190°C	10 g/10 min	CTM E005 (ISO 1133)

(\*) Tests are performed according to Cabot Test Methods (CTM) based on international standards.

Quoted test results should not be used for specification purposes but are typical test values intended for guidance only.

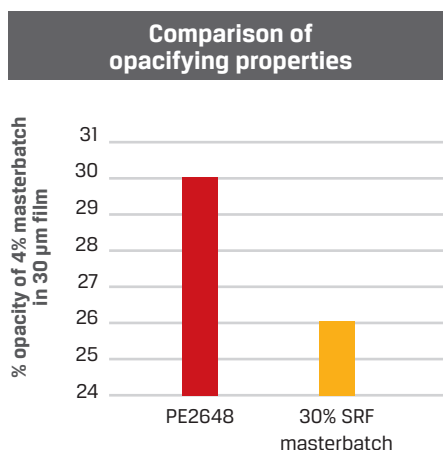

It has been designed to offer a superior level of performance compared to other utility black masterbatches.

## Packaging

PLASBLAK PE2648 is supplied in regular pellet form packed in 25 kg bags. It should be stored in a dry place.

Recommended storage life: up to 1 year provided it is stored as directed.



**NORTH AMERICA**  
Cabot Corporation Business and Technical Center  
157 Concord Road  
Billerica, MA 01821-7001  
USA  
**TEL** +1 800 462 2313  
**FAX** +1 978 670 7035

**SOUTH AMERICA**  
Cabot Latin American Division  
Rue do Paraíso, 148 - 5º andar  
04103-000, Sao Paulo, SP BRAZIL  
**TEL** +55 11 2144 6400  
**FAX** +55 11 3253 0051

**EUROPE**  
Cabot Specialty Chemicals  
Interleuvenlaan 15 i  
3001 Leuven, BELGIUM  
**TEL** +32 16 39 24 31  
**TEL** +32 16 39 25 68  
**FAX** +32 16 39 24 44

**MIDDLE EAST/AFRICA**  
Cabot Specialty Chemicals  
Jebel Ali Free Zone  
LOB 15, Office 424  
Dubai  
UNITED ARAB EMIRATES  
**TEL** +971 4 8871 800  
**FAX** +971 4 8871 801

**ASIA PACIFIC**  
Cabot China Ltd.  
558 Shuangbai Road  
Shanghai 201108, CHINA  
**TEL** +86 21 5175 8800  
**FAX** +86 21 6434 5532

**JAPAN**  
Cabot Specialty Chemicals, Inc.  
Sumitomo Chiba-Daimon Idg. 3F  
2-5-5 Shiba Daimon, Minato-ku, Tokyo 105-0012, JAPAN  
**TEL** +81 3 6820 0255  
**FAX** +81 3 5425 4500

This information is provided as a convenience and for informational purposes only. No guarantee or warranty as to this information, or any product to which it relates, is given or implied. This information may contain inaccuracies, errors or omissions and CABOT DISCLAIMS ALL WARRANTIES EXPRESS OR IMPLIED, INCLUDING MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE AS TO (i) SUCH INFORMATION, (ii) ANY PRODUCT OR (iii) INTELLECTUAL PROPERTY INFRINGEMENT. In no event is Cabot responsible for, and Cabot does not accept and hereby disclaims liability for, any damages whatsoever in connection with the use of or reliance on this information or any product to which it relates.