



ELFTEX[®] TP Specialty Carbon Black



ELFTEX TP specialty carbon black is the industry standard for UV protection in demanding plastic applications where superior cleanliness is required.

Product Form: Pellets

Product Description

ELFTEX TP specialty black belongs to the "P-TYPE" family.

P-type carbon blacks are specialty blacks with tight product specifications in order to meet stringent performance requirements for critical applications requiring exceptional UV performance and cleanliness. Specifically, Cabot's ELFTEX TP specialty carbon black meets industry requirements for small particle size and superior chemical and physical purity including extremely low toluene extract and sulfur as well as low grit and ash.

If you are designing and processing applications such as wire and cable jacketing, plastic pressure pipe, geomembranes, or any other plastic products requiring excellent UV protection, you appreciate the clear advantages delivered by ELFTEX TP specialty carbon black.

Performance Features

- Excellent UV absorption
- Meets coefficient of absorption (COA) requirement for telecom jacketing
- Small particle size for pressure pipe and cable jacketing applications
- Excellent chemical and physical cleanliness
- Excellent organoleptic properties
- Low compound moisture absorption
- Good processability for smoother surfaces

Typical Applications

ElfTeX TP specialty carbon black offers excellent UV performance, high dispersibility and masterbatch dilutability as well as high cleanliness for a range of applications:

Pipe

- Pressure pipe for potable water and gas
- Irrigation pipe

Wire and cable

- Telecom jacketing
- Power cable jacketing

Geomembranes

ELFTEX[®] TP Specialty Carbon Black

MSDS


Material safety data sheets are available from all regional sales offices. The location of the nearest sales office can be found below.

Typical Properties

PROPERTY	VALUE	TEST METHOD
OAN (cc/100g)	98	ASTM D-2414
Iodine number (mg/g)	92	ASTM D-1510
Tint (%)	104	ASTM D-3265
325 mesh residue (ppm)	<20 ppm	ASTM D-1514

Performance Characteristics

ELFTEX TP SPECIALTY CARBON BLACK PERFORMANCE

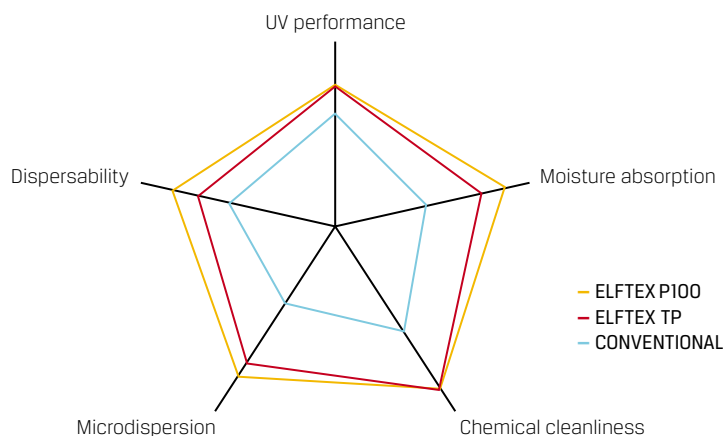

Standard Packaging Options

Bag	25 kg paper
IBC	1,000 kg, 200/220 cm



cabotcorp.com

NORTH AMERICA

Cabot Corporation Business and Technical Center
157 Concord Road
Billerica, MA 01821-7001
USA
TEL +1 800 462 2313
FAX +1 978 670 7035

SOUTH AMERICA

Cabot Latin American Division
Rue do Paraíso, 148 - 5º andar
04103-000, Sao Paulo, SP BRAZIL
TEL +55 11 2144 6400
FAX +55 11 3253 0051

EUROPE

Cabot Specialty Chemicals
Interleuvenlaan 15 i
3001 Leuven, BELGIUM
TEL +32 16 39 24 51
TEL +32 16 39 25 13
FAX +32 16 39 24 44

MIDDLE EAST/AFRICA

Cabot Specialty Chemicals
Jebel Ali Free Zone
LOB 15, Office 424
Dubai
UNITED ARAB EMIRATES
TEL +971 4 8871 800
FAX +971 4 8871 801

ASIA PACIFIC

Cabot China Ltd.
558 Shuangbai Road
Shanghai 201108, CHINA
TEL +86 21 5175 8800
FAX +86 21 6434 5532

JAPAN

Cabot Specialty Chemicals, Inc.
Sumitomo Chiba-Daimon Bldg. 3 F
2-5-5 Shiba Daimon,
Minato-ku, Tokyo 105-0012, JAPAN
TEL +81 3 6820 0255
FAX +81 3 5425 4500

The data and conclusions contained herein are based on work believed to be reliable, however, Cabot cannot and does not guarantee that similar results and/or conclusions will be obtained by others. This information is provided as a convenience and for informational purposes only. No guarantee or warranty as to this information, or any product to which it relates, is given or implied. This information may contain inaccuracies, errors or omissions and CABOT DISCLAIMS ALL WARRANTIES EXPRESS OR IMPLIED, INCLUDING MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE AS TO (i) SUCH INFORMATION, (ii) ANY PRODUCT OR (iii) INTELLECTUAL PROPERTY INFRINGEMENT. In no event is Cabot responsible for, and Cabot does not accept and hereby disclaims liability for, any damages whatsoever in connection with the use of or reliance on this information or any product to which it relates.

The ELFTEX name is registered trademarks of Cabot Corporation.

©2014 Cabot Corporation.
9/2014